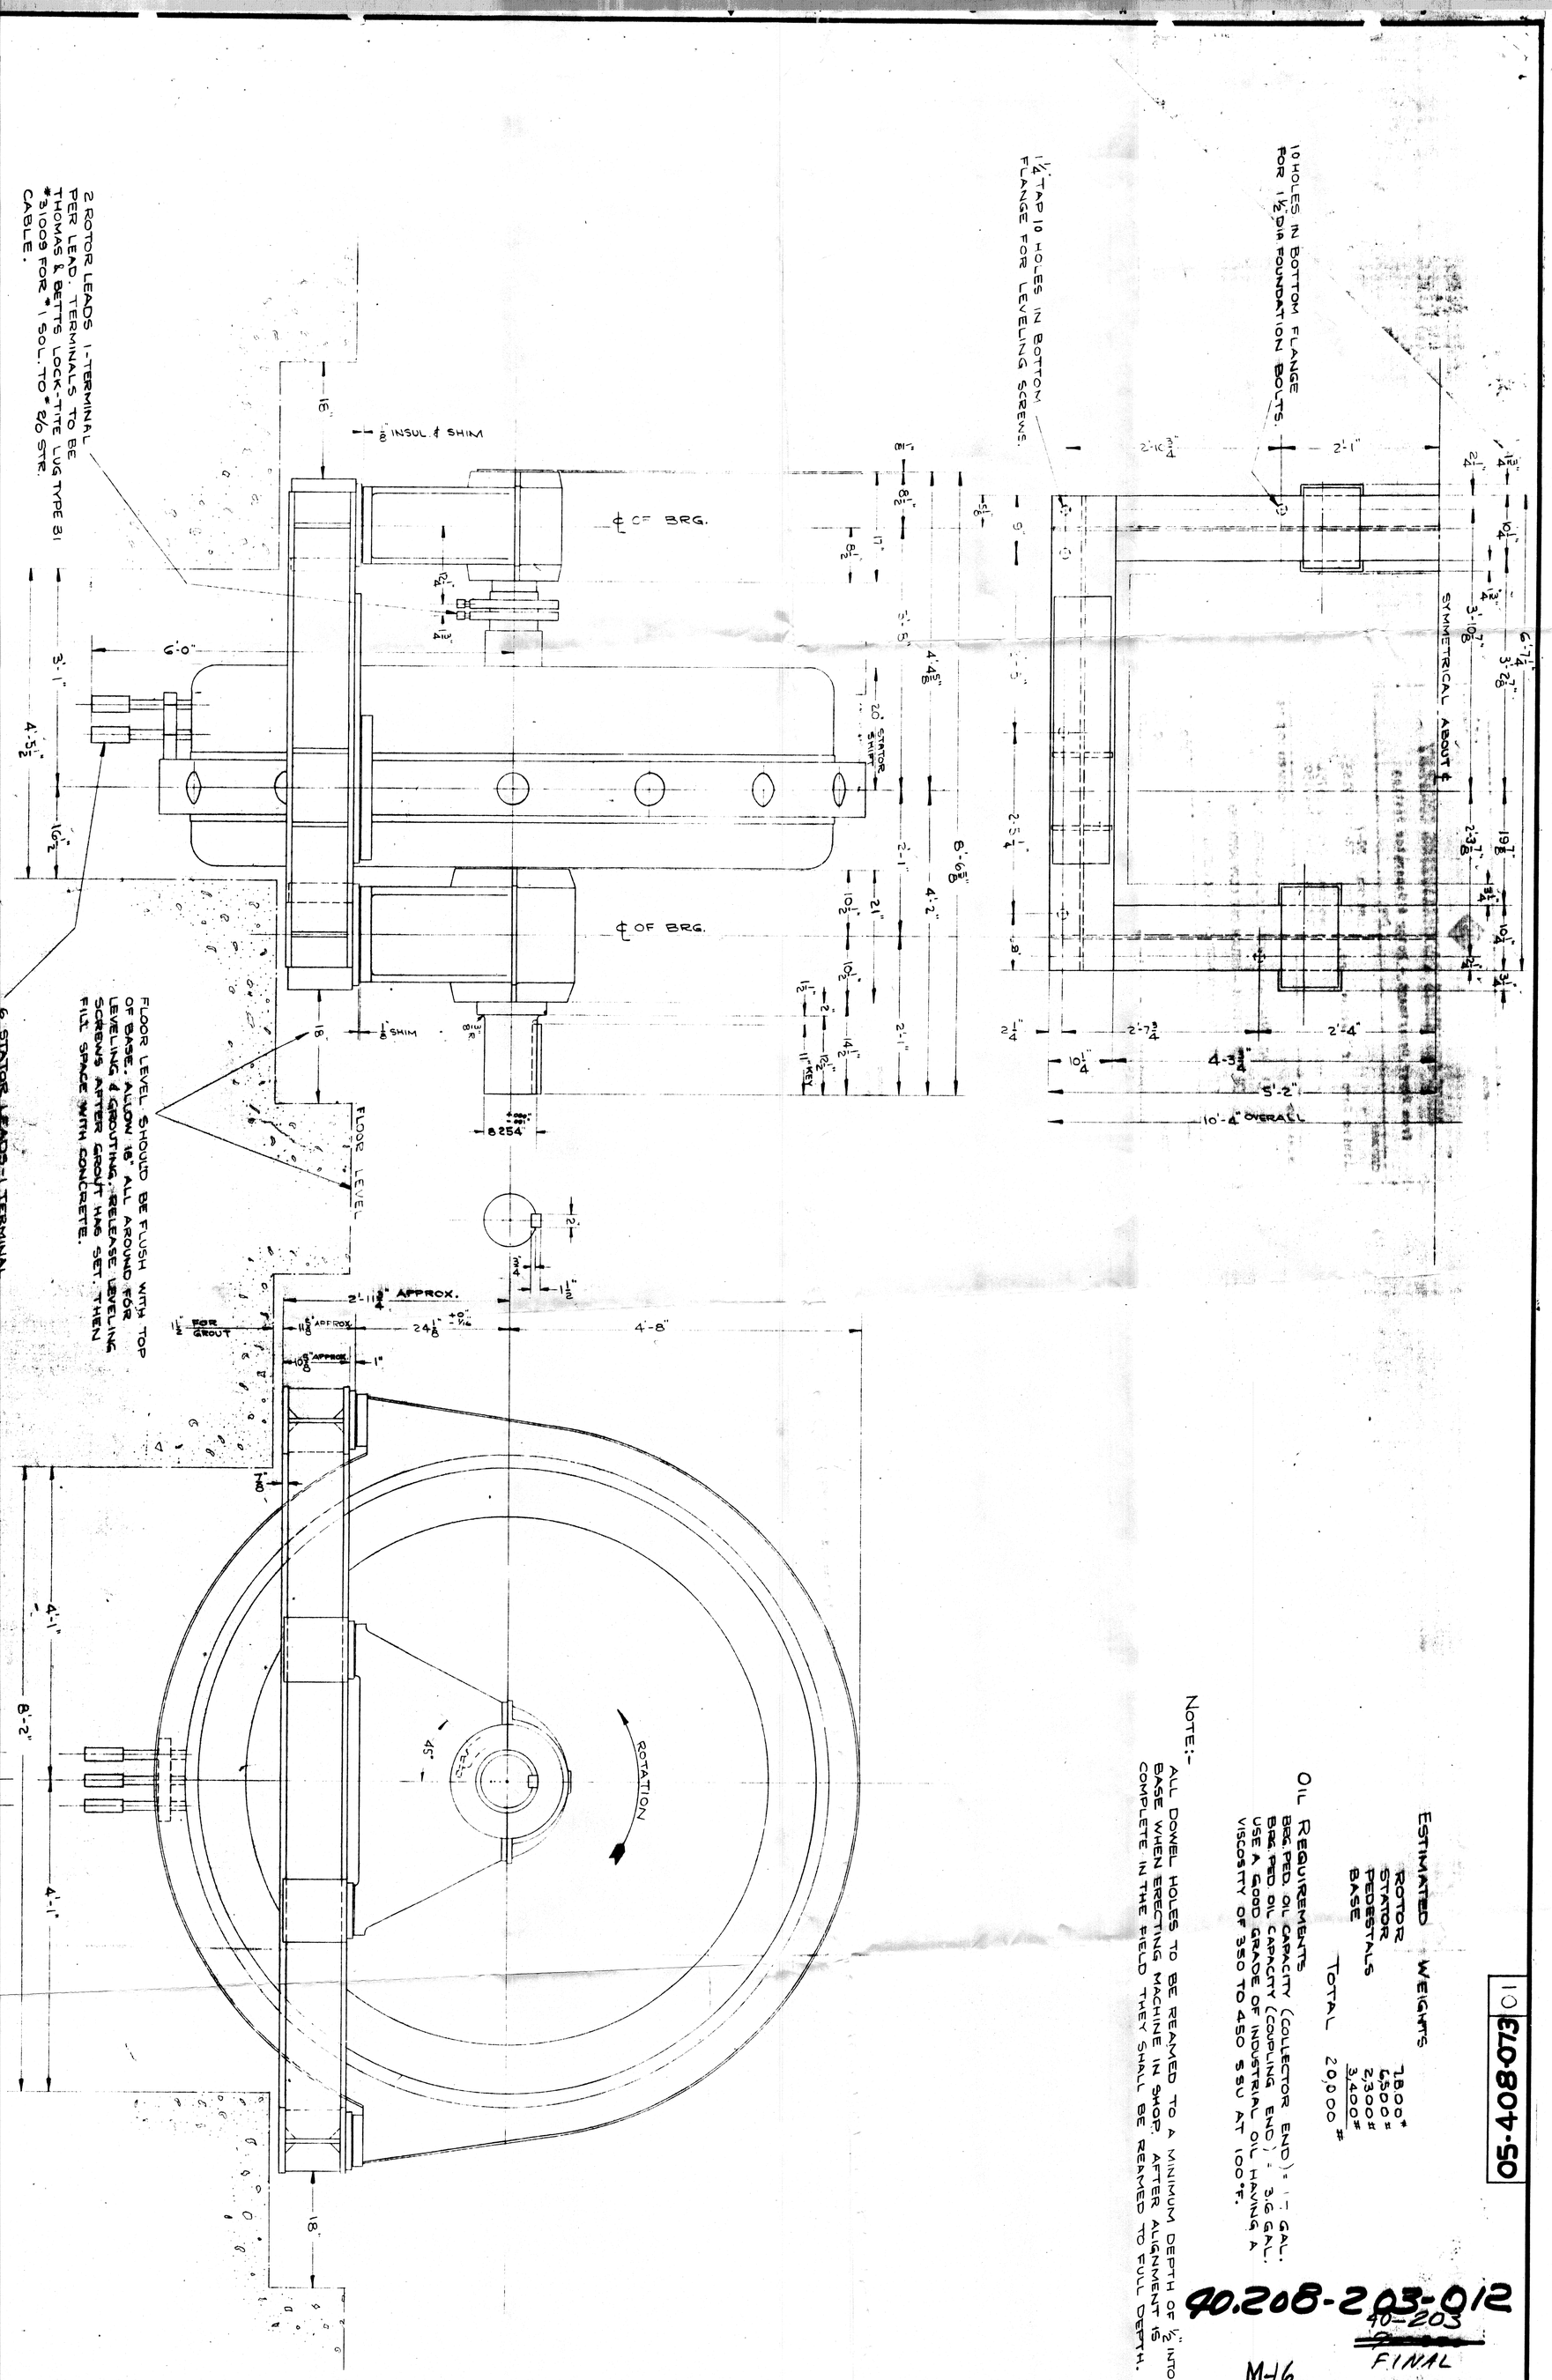

Note:-

All dowel holes to be reamed to a minimum depth of ½" into base when erecting machine in shop. After alignment is complete in the field they shall be reamed to full depth.

Oil Requirements

Brg. Ped. Oil Capacity (Collector End) = 1.7 Gal.
Brg. Ped. Oil Capacity (Coupling End) = 3.6 Gal.
Use a good grade of industrial oil having a viscosity of 350 to 450 SSU at 100°F.

Estimated Weights

Rotor	7,800#
Stator	5,500 #
Pedestals	2,300#
Base	3,400#
Total	20,000 #

40.208-203-012
40-203
FINAL

M-16
2-0550-26751 DLE 17264
LITHIUM CORP. OF AMERICA, INC.

Mark No. 401

01 6-21-54

OUTLINE
A-C MOTOR
800 H.P. 200 R.P.M.
4160/2300 VOLTS - 111/201 AMPS.
3 PHASE 60 CYCLE

ALLIS-CHALMERS MFG. CO. MILWAUKEE, WIS., U.S.A.
ELECTRICAL (MOTOR & GENERATOR) DEPT.
DRAWN L.J.L. DATE 6/14/54 TRACED DATE
CHECKED QA DATE 6/15/54 O. K. DATE
SIMILAR TO 05-404-965 SCALE N.T.S. —12"

05-408-073

05-408-073 01

05-408-073

UNCONTROLLED COPY
CURRENT WHEN ISSUED
JUN 1 1999