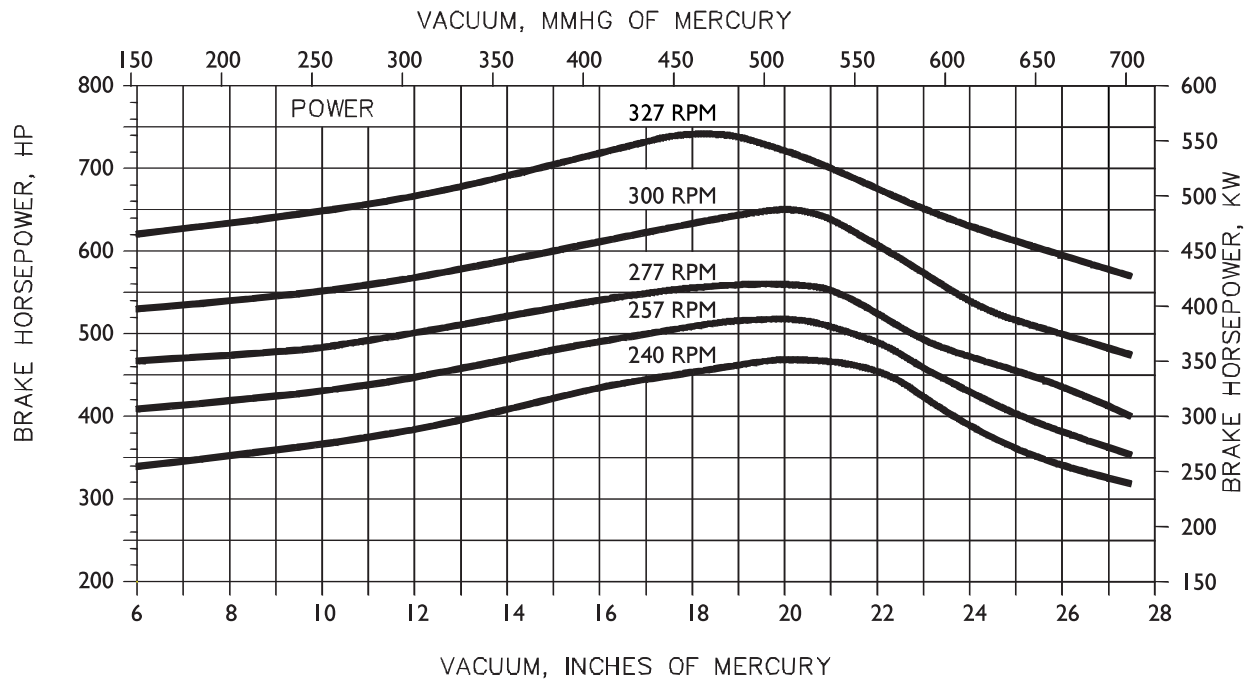
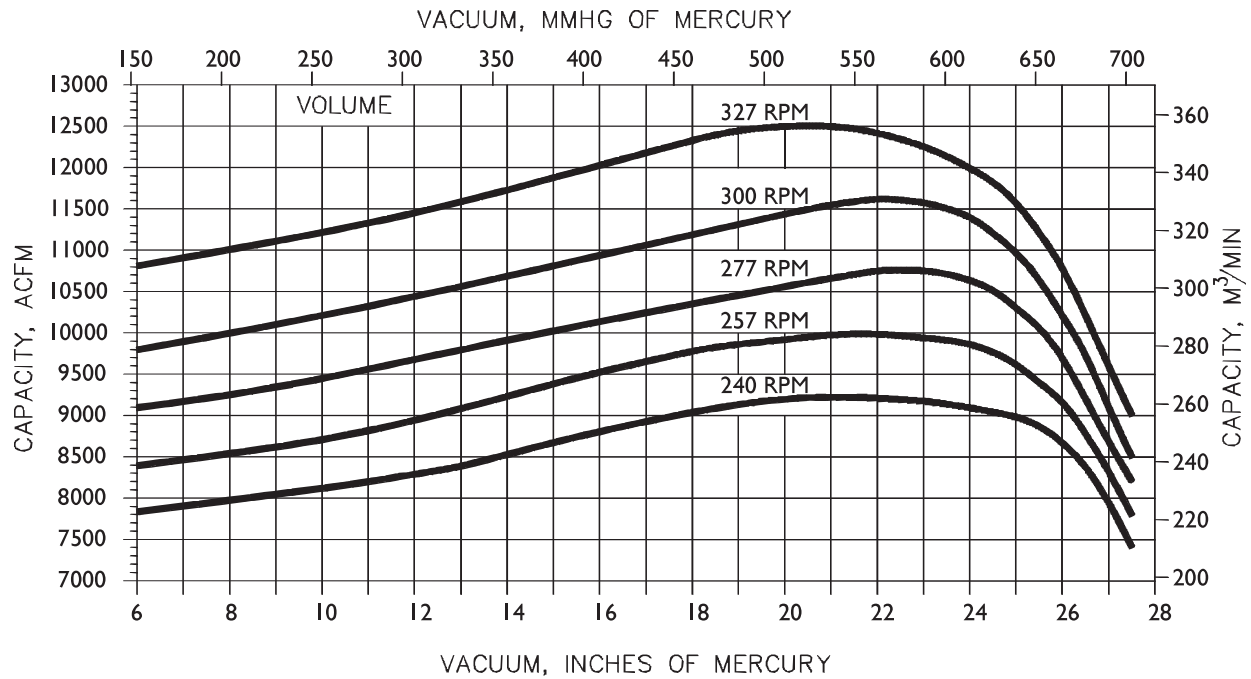


SINGLE STAGE LIQUID RING VACUUM PUMP - CONICAL DESIGN | PERFORMANCE CURVE


These performance curves are based on operating conditions with dry air at a temperature of 68°F (20°C), operating water at a temperature of 60°F (15°C), and discharge pressure of 29.92 inHg abs. (1013 mbar) with a tolerance of ± 5%.

Water Requirement

Vacuum range " Hg	Flow Rate	
	GPM	CMH
0 to 15	88	22
15 to 20	114	26