




LJ3048 HEAVY-DUTY JAW CRUSHER

One of the original and most reliable jaws Lippmann has to offer is the 3048 jaw crusher. It is ideally sized for easy transportation and is set up with the production and reliability needed for the toughest and most demanding of applications. Being the heaviest jaw on the market in this size range makes it unique and ideal for any hard rock applications.

- An extra heavily ribbed steel frame – stress relieved after welding and before machining
- One piece steel pitman
- Heat-treated forged alloy steel eccentric shaft
- Steel cheek plates
- Oversized tapered roller bearings in both the pitman and frame. Tapered roller bearings exhibit a greater load carrying capacity compared to an equal sized spherical roller used in competitor's machines
- Reversible manganese steel jaw dies and extensions
- Two heavy-duty flywheels, one grooved for V-belts
- Automatic Oil Lubrication System which delivers a metered flow of filtered oil to each bearing



LJ3048

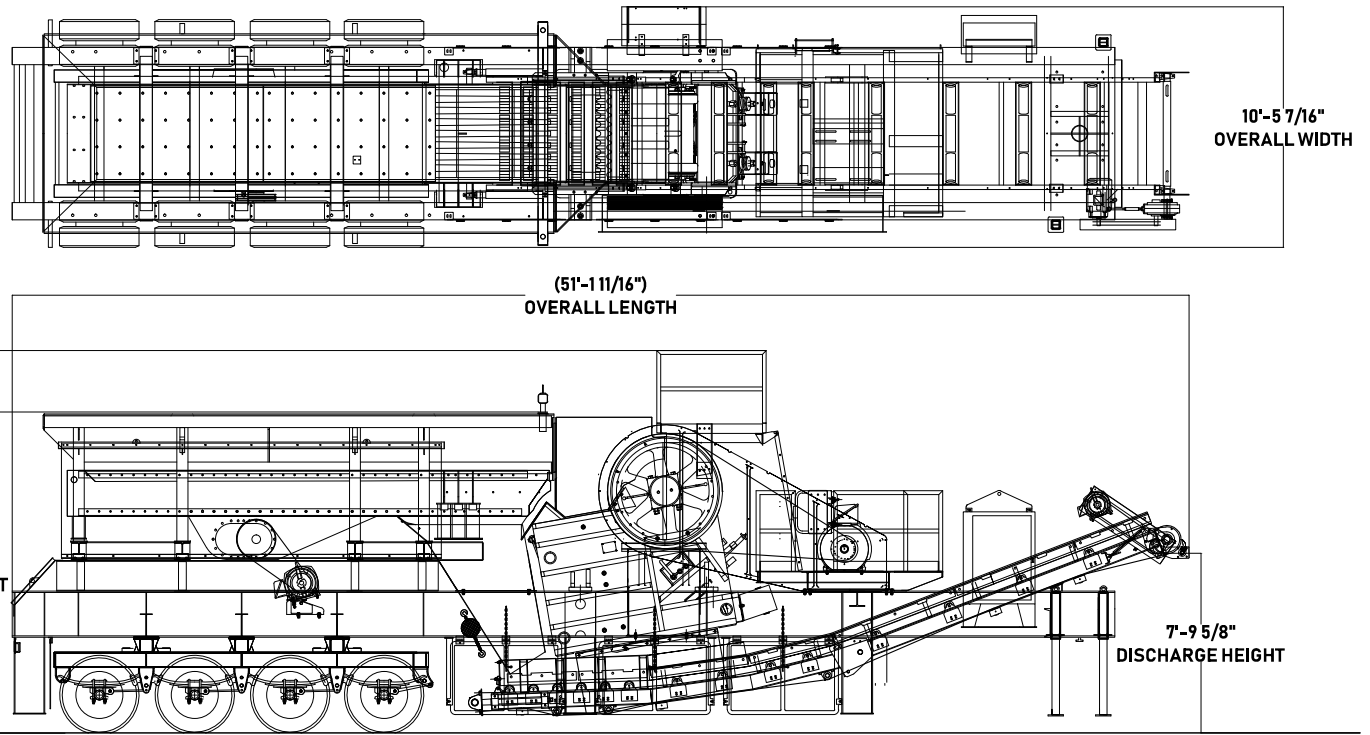

SPECIFICATIONS

Jaw Crusher	30"x48"	Horsepower	200	Transportation (lbs)	11R22.5
RPM	230	Jaw Crusher	1	Tires	60500
Feed Size	24"	Autolube	7.5	Rear Axle	49500
Discharge Conveyor	48"	Toggle Power Unit (optional)	1.5	King Pin	110000
Operating Speed	318	Taper Wedge (optional)	40	Total	30500
Feeder	51"x20'	Feeder		Weight of Feeder	30500
Operating Speed	830			Module	
Grizzly Length	5'			Total Weight	140500

Hydraulic toggle or manual toggle plate available.
 * Manual toggle plate option only.
 Closed Side Setting (CSS) inches.

2	2.5	3	3.5	4	4.5	5
-	-	226-259	259-303	303-378	339-417	378-454
6	7	8	10	12	14	-
455-531	594-659	*659-755	-	-	-	-

ADDITIONAL OPTIONS

Hydraulic Leveling Jacks - (4) 70,000lb
 Six (6) Run-On Jack Legs
 NEMA - 12 Motor Control Center

Cross Conveyor Under Grizzly
 Hydraulic Folding Hopper Extensions
 Extended Front Discharge

Taper Wedge Lock
 Tire Bulkheads

